Safelock M Seals

To close

01 Pass the Cable through the compartment you plan to seal and insert it on the seal's capsule "A" to activate the locking mechanism

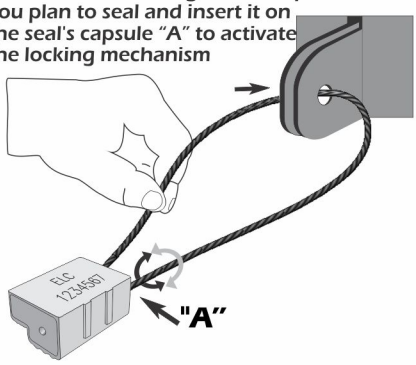

02 1.Pull the cable tight to the tightest aperture possible.

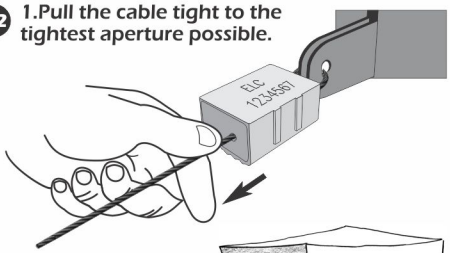



ATTENTION!

AVOID LOOSE SEALING.

03 Confirm the seal is locked by gently pulling it as shown below

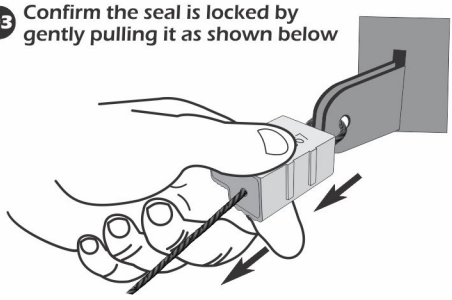

ATENÇÃO !

If the seal is not locked, replace and repeat steps 1 through 3.

04 1.Cut the excess Cable right next to the capsule. The cable will fray, making it impossible to be re-inserted.

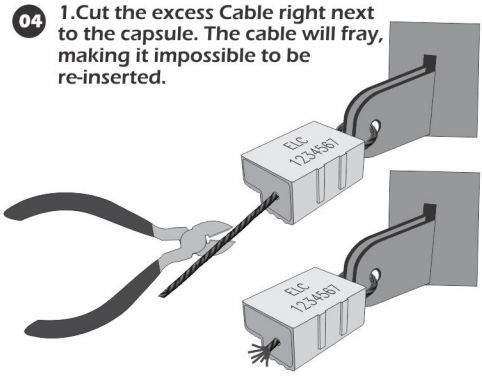

To open

1.Use a pair of pliers to cut the seal open.

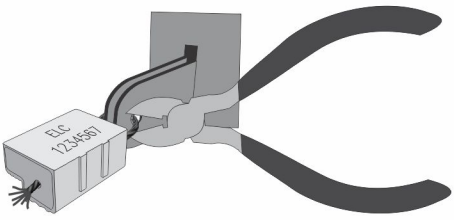

Disposal Agreement of Seals

Keep the seal until a throughout verification of the sealed compartment is performed. If there are no irregularities you may dispose the opened seal.

IMPORTANT:

ELC provides forensic services on the tampered seals in case it is needed.

ELC is not responsible for this product misuse.

The sealing of this product without observing these rules are your responsibility.

ATTENTION!

ELC Security Products
www.elcsecurity.com

USA
(305) 477-2303
e-mail: seals@elcsecurity.com

BRAZIL
+55 24 2263-9500 Ext. 2
e-mail: elc@elc.com.br